




Your diesel fuel transported and deployed quickly, legally and safely...



TRANSCUBE

TEL: +44(0)117 952 8989
22 The Green - Stoke Gifford - Bristol - BS34 8PD - UK
TRANSCUBE is a registered trademark, CERTIFIED TANKERS OHS

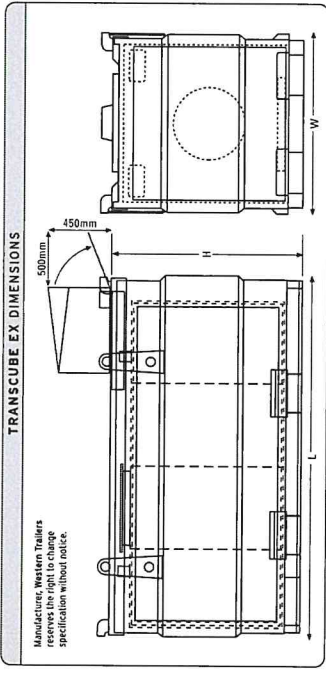

MODEL NO.	CAPACITY		DIMENSIONS			WEIGHT	
	Litres	Gallons	L	W	H	Unladen	Laden
10TCEX	960	210	1260mm	1150mm	1310mm	576kg	1439kg
20TCEX	1966	432	2300mm	1150mm	1310mm	845kg	2644kg
30TCEX	2944	648	2300mm	1630mm	1310mm	1075kg	3725kg

TRANSCUBE EX OPTIONS

TC EX HOOD	Pump hood required for electric pump options:	MHPF - Manual diaphragm hand pump c/w 4 mtr delivery hose and trigger nozzle.
EH12VFPPM - 12v 70/min self-priming pump c/w filter, M33 flow meter, 4mtr delivery hose and auto shut off nozzle.	EH24VFPPM - 24v 40/min self-priming pump c/w filter, M33 flow meter, 4mtr delivery hose and auto shut off nozzle.	3/8F+RNRV - 3/8" fuel feed and return tank bulkhead fittings c/w 1/2" valves, foot valve and strainer.
EB24VFPPM - 24v 40/min self-priming pump c/w filter, M33 flow meter, 4mtr delivery hose and auto shut off nozzle.	EB24VFPPM - as above with 24k.	1/2F+RNRV - 1/2" fuel feed and return tank bulkhead fittings c/w 1/2" valves, foot valves and strainer.
EB10VFPPM - as above with 100k.	EB10VFPPM - as above with 24k.	1/2F+R - 1/2" fuel feed and return tank bulkhead fittings c/w 1/2" valves.
EB12VFPP - 12v 40/min self-priming pump c/w filter, M33 flow meter, 4mtr delivery hose and auto shut off nozzle.	EB12VFPP - as above with 24k.	1/20FT90 - Overfill prevention thermostat.
WPFFC - Water and particulate removal 30 micron nominal filter for hood electric pump option only.		

STANDARD COLOURS RAL 1028 RAL 9001

COLOUR OPTIONS RAL 1028 RAL 9001

TEL: + 44 (0) 117 952 8989

Transcube tank and bund are fabricated from 3mm mild steel to a quality standard ISO9001:2000.

