

Technical sheet :

EXTENSIBLE JIB WITH WINCH




Benefits

- Suspended load handling solution for all type of building sites.
- Perfect for transporting and placing beams, frames and other light and bulky elements.
- Its telescopic boom allows to gain greater flexibility while keeping an important forward reach.
- Tubular structure designed for an optimal weight / rigidity ratio
- Excellent adaptability.

Technical characteristics

- Oil immersed negative brake.
- Safety: homologated swivel self locking hook.
- Safety: end of cable/hook upper position automatic movement stop.
- Manual extension (manual winch) with adjustable jib length.
- Adjustable length for an excellent polyvalence (extension: manual jib).

Technical characteristics		JW 7000 / 1000 39M	PT 800
Load centre of gravity (mm)	c	-	1791
Capacities			
Max. outreach (mm)	r1	4000	4525
Working height (mm)	h21	35000	32000
Capacity (kg)		800	800
Capacity 2 (kg)		1000	1000
Max @ outreach 2 (mm)		7000	7183
Weight and dimensions			
Overall height (mm)	h17	35000	-
Width (mm)		-	870
Length (mm)		-	4632
Overall weight (kg)		559	605
Cable length (mm)		37000	37000
Working Parameters			
Machine Equipement		Return piping to hydraulic oil tank	Hydraulic line, Return piping to hydraulic oil tank
Hook Speed (m/mn)		48	48
Hydraulic system		false	false
Machines compatibility		JW 7000 / 1000 39M	PT 800
Reference number E-RECO		921323	921323
MRT 2150 Privilege Plus		-	X
MRT 2470 Privilege Plus		-	X
MRT 2550 Privilege Plus		-	X
MRT 3050 Privilege Plus		-	X
MRT 3255 Privilege Plus		-	X
MRT-X 2150 Privilege Plus		-	X
MRT-X 2470 Privilege Plus		-	X
MRT-X 2550 Privilege Plus		-	X
MRT-X 3050 Privilege Plus		-	X
MRT-X 3255 Privilege Plus		-	X

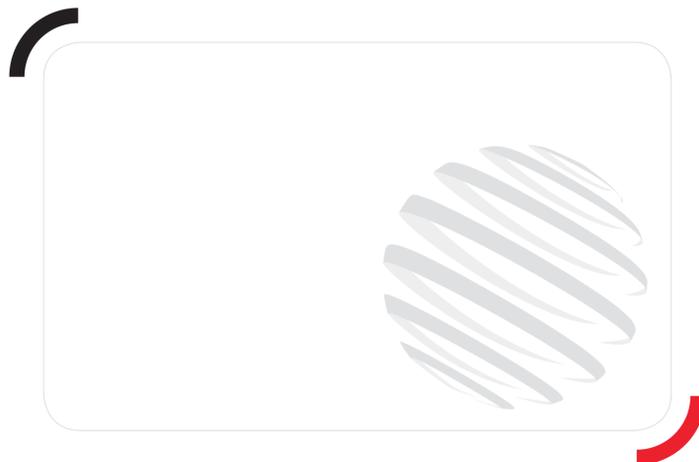

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes